



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

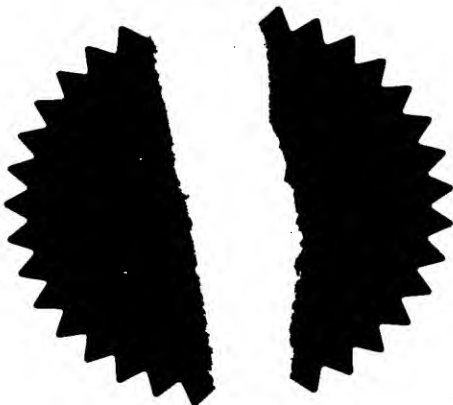

Signed

Dated 30 September 2003



2

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road

Newport

Gwent NP9 1RH

30 OCT 2002

1. Your reference

2. Patent application number

(The Patent Office will fill in this part)

0225220.3

3. Full name, address and postcode of the or of each applicant (underline all surnames)

ANDREW SEAN GORDON DALY,
MARYS BOROUGH HOUSE,
GLANMIRE,
CO. CORK,
IRELAND.

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

7229560001

4. Title of the invention

"A TENDON AND LIGAMENT SUPPORT"

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

40 Greengates
Benington Park
Benington
Herts
SG2 7BU

522
RSC
14/5/03
C.M.C.

Patents ADP number (if you know it)

7229560002 G

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

NO

522
RSC
14/5/03
C.M.C.

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description

15

Claim(s)

5

Abstract

1

Drawing(s)

14

214

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination

(Patents Form 10/77)

Any other documents

(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Andrew Daly

Date

28/10/02

12. Name and daytime telephone number of person to contact in the United Kingdom

ANDREW DALY 00353 21 4355275

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

1
DUPLICATE

Inventor: Andrew Sean Gordon Daly,
Marysborough House,
Glanmire,
Co. Cork,
Ireland.

Title: "A Tendon and Ligament support"

Introduction

The present invention relates to a protection system that prevents and treats damage to the tendons, ligaments and other structures of a horse's leg which would otherwise be caused by exercise induced strain, exercise induced hyperthermia or by external striking.

It is comprised of a cannon bone embracing collar, a pastern bone embracing collar and a connection between the two collars, a soft inner impact absorbing foam lining, a series of stiff and hard composite panels attached to the outer surface of this lining, air ventilation passages and channels and a method of fastening the device to the horse's legs.

Tendon and ligament supports are well known in the field of equine medicine. They are used as a support system to prevent tendon and ligament injury and to facilitate the treatment of such tendon and ligament injury. One of the most delicate parts of a horse's anatomy is the area of the canon bone, fetlock joint and pastern regions of the lower leg beneath the knee and hock joints in particular the flexor tendons and suspensory ligaments are subject to strain injury. There are various causes of these injuries, all of which are well known to those engaged in the equine industry. The primary cause of such injury is generally over rotation of the fetlock joint for example, if a horse is excessively tired or unfit then the fetlock joint rotation can cause a dangerous level of tendon strain as it gallops at speed. It has been suggested that when tendon elongation is less than 8% of its relaxed length, there is no danger whatsoever to a horse and where the elongation exceeds 8% and progressively increases to 12% there is increasing stress until there is generally failure when the tendon elongation exceeds 12%. These figures must be taken as illustrative only because, obviously, the amount of tendon elongation will vary from horse to horse and the damage will also vary possibly depending on ambient conditions. However, these figures give some idea as to the approximate range of strain which need to be considered.

The second major cause of equine tendon and ligament injury is over heating of the tendon material which in turn arises out of the dynamic loading experienced as a horse gallops. Recent

Research carried out by veterinary science institutions has concluded and published such conclusions which state that the heat generated within the Superficial and Deep Digital Flexor Tendons and the Suspensory and Check Ligaments of the horses lower leg during exercise is a significant factor in causing the onset of injury to this said anatomy. The studies show that the constant dynamic loading on these tendons and ligaments while the horse gallops causes an accumulation of heat that can reach 45 degrees centigrade. Collagen cells have viability only below a temperature of 42.5 degrees C. Any temperature at or above 42.5 degrees C will result in irreparable necrotic damage to the collagen cells of which the tendon tissue is comprised. By reducing this build-up of temperature in the tendon and ligament group while exercising, cell necrosis is reduced and consequently the risk of injury to this anatomy can be significantly reduced.

Horse Trainers frequently use existing boots and bandages for the purpose of protecting the horses legs against traumatic injuries caused by a strike impact from a hard object, most often a strike impact from another of the horse's legs. However these conventional Boots or Bandages, because they entirely cover the tendons while exercising, heat insulate the horses tendons and ligaments and prevent the aforementioned exercise induced heat from escaping to the outside air. **Figure 21** illustrates this problem where the heat transmits from the tendon core outward to the leg surface where it is blocked from further dissipation by the insulating effect of the conventional Boot or Bandage. Heat within the tendon core will then accumulate. Consequently the risk of heat injury to the Tendons and Ligaments is increased by the use of such heat insulating Boots and Bandages. The horse in nature is protected somewhat against such exercise induced heat build-up within the Tendon and Ligament cores, by the fact that as it gallops the cold air, passing unrestricted over the surfaces of the bare leg of the horse, takes with it a proportion of this said heat build up and thereby cools or reduces the core temperature of these tendons and ligaments. By using conventional Boots and Bandages this natural cooling method is lost.

A third major cause of tendon damage is when the tendons of the front leg are struck by the horses hind leg. The horse's lower leg below the knee and hock joints, are also subject to a variety of traumatic injuries caused by a strike impact from a hard object, most often a strike impact from another of the horse's legs. These injuries include but are not limited to traumatic injury of the superficial digital flexor tendon, deep digital flexor tendon, the suspensory ligament, the check ligament, the extensor tendons, the skin, the synovial sheaths, the sesamoid bones, the coronet band and to the entire metacarpo-phalangeal joint area. There are in existence devices that are designed to protect the above- mentioned specific anatomy from a traumatic injury caused by a strike impact from another of the horse's legs. These conventional strike protection devices aim to shield the horses legs from an impact and are at present constructed from one of the following materials: Leather, Plastic, rubber, woven fabric and non rigid kevlar. However it has been observed by veterinary surgeons that while these devices prevent penetration of the walls of the

Devices, they are not entirely effective at preventing injury. Indeed serious traumatic injuries to the aforementioned specific anatomy have continued to occur frequently despite the horses in question wearing these conventional devices at the time of injury. **Figure 28** illustrates this very problem which commonly occurs during an accidental over-reach while wearing one of the currently available devices. The hind leg can strike into the tendons of the front leg with an impact force in excess of 1000 KG. It can be seen that the conventional strike prevention devices when struck by the hind leg at such forces, while they will prevent actual penetration of the impacting object through the wall of the device, they do not have sufficient stiffness and hardness to maintain their original shape. Consequently their shape deforms at the point of impact and the force is concentrated and effectively penetrates through to the fragile tendons and ligaments underneath. The result is inevitably a traumatic injury. The sources of impact include not only another of the horse's own legs but also can be from a fence which a horse is jumping, a polo mallet, a polo ball, the terrain or any other possible sources of external impact to which a horse could be exposed.

A further problem that occurs when a horse suffers a leg injury is that there is a high incidence of consequent tendon and ligament injury to the opposite leg as the animal takes the weight off the injured limb and places it all onto the opposite leg. Also, rotation of the fetlock joint can lead to a risk of carpal bone chip fracture.

In this specification the term "rotation" when used in relation to joints means pivoting or movement as would be the normal use of the joint and not as it is sometimes used to mean a twisting or other abnormal distortion of the joint. Thus, the terms "rotation" and "pivoting" are used interchangeably in this specification. Also the terms "Fetlock joint" and "Metacarpophalangeal joint" refer to the same joint.

Many methods have been used to prevent or cure these problems and have heretofore been relatively inefficient and of limited or little use. For example, in British Patent Specification No. 2 166 655 there is described and claimed a shock absorbing fetlock support of this general type, that can be best described as an auxiliary tendon support which is not in fact a full support system, even though it is described as such. It would undoubtedly absorb a certain amount of shock, but does not effectively limit rotation of the fetlock joint and hence tendon and ligament strain, which is the object of the present invention. This present invention transmits substantially all the downward force exerted by the horse's mass directly from the tendons and ligaments to the front of the canon and pastern bones thereby alleviating strain from the horse's own tendons. The problem is that it does not take what is effectively the impact of the horse's hoof and the weight transmitted there through all of which is transmitted through the fetlock. This is because, in nature when the horse gallops, the hoof strikes the ground causing the fetlock joint travels downward towards the ground and while undoubtedly one of the problems is that this downward extension by the fetlock joint is transferred to the tendons and ligaments of the horse. The invention

~f British Patent Specification No. 2 166 655 would undoubtedly assist in protecting the fetlock joint but it does not as suggested limit the strain on the tendons.

British Patent Specification No. 1 153 613 describes a substantially similar device, which again suffers from the same disadvantages as that of the device illustrated in the aforementioned British Patent Specification No. 2 166 655.

U.S. Patent Specification No. 5,579,627 describes a protection wrap for the horse's lower leg. In a laboratory experiment conducted by a major veterinary university in the UK to evaluate various non rigid support systems for the equine metacarpophalangeal joint, this device was assessed as a means of supporting the metacarpophalangeal joint. It concluded that the device described by U.S. Patent specification No. 5,579,627 had no significant effect in reducing tendon and ligament strain in horses. This is due to the fact that the soft materials from which it is constructed do not have sufficient strength and stiffness to cope with the immense forces of 2000 KG – 3000KG of tensile load on the flexor tendons as a horse exercises, whereas the invention described here was proven to have a significant effect in reducing tendon and ligament strain in horses. U.S. Patent Specification No. 5,115,627 illustrates a similar form of boot used to protect a horse's leg, but again it does not prevent the fetlock and tendons being under constant stress. Also none of these conventional supports have adjustability to vary the level of support.

Thus a need is identified for a tendon and ligament support that can effectively limit tendon and ligament strain as a horse exercises or rests by limiting the degree of rotation of the fetlock joint to a safe level and of which such support can be adjusted by the user.

Thus a need is identified for a tendon and ligament support applied to the horse's leg that will cool the said tendons and ligaments during exercise.

Thus a need is identified for a tendon and ligament support for the horse's leg that has the stiffness and strength to maintain it's shape during the severest of strike impacts. It can therefore distribute the impact forces over a wider area and consequently significantly reduce the possibility of a strike injury. There is also identified a need for a strike impact protection device that can deflect the strike impact away from the horse's leg in the quickest possible time. This immediate deflection will further aid to protect the horse's leg.

This present invention prevents injury to these Tendons and Ligaments in a number of ways. Firstly the invention is directed towards providing such a tendon and ligament support which will have the advantage, not alone of supporting the tendons and ligaments, but of effectively replacing the tendons and ligaments as it were and ensuring that all or substantially of the downward force exerted by the horse's mass, while exercising or standing, is directly transmitted from the flexor

tendons and suspensory ligament to the front of the canon and pastern bones. Secondly by incorporating a built-in cooling system which effectively cools the tendons during exercise. Thirdly this present invention aims not merely to stop an impacting object from penetrating through the walls of the device and injuring the Tendons and Ligaments beneath, but to prevent any of the forces of impact from reaching the said anatomy.

The invention is further directed towards providing a tendon and ligament support which can be used not alone for the prevention of tendon and ligament injury but also as an improved treatment of such injury.

Statements of Invention

According to the invention, there is provided a tendon and ligament support of the type comprising:-

1. a canon bone embracing collar;
2. a pastern bone embracing collar,
3. a connection between the two rollers; characterised in that the connection comprises a substantially non rigid and inelastic connection piece incorporating a pivot means arranged to exert a resistance to pivoting over a predetermined range of fetlock joint rotation, to remove from the tendons and ligaments controlled amounts of the downward force exerted by the horses mass on the tendons and ligaments over the predetermined range of fetlock joint rotation. By transmitting the strain exerted on the tendons and ligaments to the front of the canon and pastern bone, while also supporting the fetlock joint from over-rotating significantly, this reduces the risk of injury to the horse.
4. A shock absorbing foam lining .
5. A front panel with air intakes allowing air or fluid to penetrate through the front of the device.
6. Connecting channels which allow the coolant air or fluid that enter through the front to pass from the front of the leg around to the back of the leg where the tendons and ligaments in question are located.
7. A gas permeable panel covering the tendon area at the back of the leg which allows hot or cold air or fluid to pass. This comprises materials that include but are not restricted to a

gridwork of perforated foam or a gas permeable membrane such as a fabric with open weave.

8. A curved composite material panel of a hard and smooth outer surface, attached to the back of the foam lining about the position of the horse's flexor tendons and suspensory and check ligaments.
9. A curved composite material panel of a hard and smooth outer surface, attached externally to the front of the foam lining about the position of the horse's extensor tendons.
10. A curved composite material panel of a hard and smooth outer surface, attached externally to the foam lining about each side of the horse's metacarpophalangeal joint.
11. A means of fastening the device to the horse's leg

In one embodiment of the invention the pivot means incorporates an adjustment means to vary the amount of resistance to pivoting and therefore the range of fetlock joint rotation over which it exerts the said resistance. The advantage of this is that it allows veterinary surgeons to control the healing of the injured tendons. By means of its quick adjustment control it is possible to reduce gradually the amount of support it provides to the injured tendons as they heal. This will overcome problems associated with tendon repair caused by sudden loading on an injured leg when a cast is removed and on return to exercise. It will also overcome the problem of adhesions of the flexor tendon and suspensory ligament. This is a build-up of scar tissue that often occurs using conventional methods of tendon injury treatment. As a certain amount of mechanical loading is important for healthy healing and prevention of adhesions, this ability of the invention described here to support the limb in a controlled manner has, in clinical cases, enabled animals to be brought back into light work earlier thus reducing the convalescence period.

In another embodiment of the invention, the pivot means is arranged to prevent pivoting beyond a predetermined critical amount of fetlock joint rotation. The advantage of this is that, when used as an injury prevention method, the device will not interfere with the normal movement of the horse during exercise but will only resist joint rotation if it should reach a dangerous level that would otherwise result in tendon strain.

Ideally, the pivot means is arranged to exert progressively increasing resistance to pivoting as the fetlock joint rotates under downward pressure. The advantage of this is that the more the fetlock joint rotates, the harder it becomes for the horse to rotate the actual joint, preventing any subsequent injury. This is very beneficial when a horse has already injured one leg, thus

preventing any further damage to the injured leg and preventing the increase load on the uninjured legs. Here a tendon and ligament support is provided in which the pivot means is arranged to exert increasing resistance to pivoting as the fetlock joint rotates under downward pressure.

In one embodiment of the invention the pivot means is arranged to exert no resistance to pivoting until the fetlock joint rotates beyond a predetermined critical amount of fetlock joint rotation. Again, while preventing injury it does not interfere with the normal movement of the horse.

In a further embodiment of the invention the connection piece accommodates limited lateral movement between canon and pastern bone which has the advantage of allowing the invention to be used on animals with abnormal or crooked joint rotation.

In a still further embodiment of the invention the pivot means is formed by a hinge having it's pivot joint concentric with the pivot point of the horse's fetlock joint. The advantage of this is that the hinge of the support device moves in exact unison with the horse's own natural movement of the fetlock joint. This will ensure that the support device does not move or slip from its correct position on the horse's leg when in use. It also has the advantage of stopping the Canon Bone Embracing Collar and the Pastern Bone Embracing Collar from being forced together under load.

Ideally there are a pair of hinges, one on either side of the fetlock joint. This provides added support to the fetlock joint, reducing the risk of dislocation from the correct position on the leg.

In a further embodiment of the invention the hinge incorporates a brake to provide desired resistance to pivoting. The brake may be adjusted to suit any individual horse's movement, which might not necessarily suit another horse as the load exerted would be individual to each animal, when affected by such factors as weight and speed.

In another embodiment of the invention the hinge incorporates a stop to prevent rotation beyond a predetermined critical amount of fetlock joint rotation. This would be advantageous in that there is no possibility that the horse would ever over-rotate the fetlock joint.

In a further embodiment of the invention the desired resistance to pivoting is provided by an artificial tensile tendon comprising an extendable connection piece connecting the collars adjacent the back of a horses leg. The ability to adjust the tension of the artificial tendon is beneficial in circumstances such as when the horse has already sustained a leg injury and its natural desire is to place the entire bodyweight onto the opposite leg. When the support is fitted to both legs, there is no risk of consequent strain injury to the opposite healthy leg.

In a further embodiment of the invention the artificial tensile tendon extends around the leg to embrace the sesamoid bones behind the fetlock joint.

In a still further embodiment of the invention there is a rigid connection between the hinge and the artificial tensile tendon on both sides of the leg to allow limited movement therebetween.

Ideally the connection piece comprises a piece of substantially inelastic material capable of limited flexion to provide pivot means.

Ideally the canon bone embracing collar incorporates a rigid elongate support extending along the canon bone and the pastern bone embracing collar incorporates a rigid elongate support extending along the pastern bone. In another embodiment of the invention the pastern bone embracing collar extends over the hoof.

In a further embodiment of the invention the elongate support is adjacent the front leg.

In a still further embodiment of the invention each collar comprises a front panel with air intakes allowing air or fluid to penetrate through the front of the device. Connecting channels in the walls of the canon bone collar allow the coolant air or fluid that enter through the front to pass from the front of the leg around to the back of the leg where the tendons and ligaments in question are located.

Preferably a cushioning material is interposed between the inside surface of the collars and the horse's leg.

In another embodiment of the invention the cushioning material is of a visco elastic foamed plastics Material.

In another embodiment of the invention the canon bone embracing collar and the pastern bone embracing collar are each opening central to the front of the leg.

In another embodiment of the invention the artificial tendon component has a central ring embracing the sesamoid bones. Anchored around the ring is an array of straps, of adjustable tension and length, which are in turn anchored to the canon bone embracing collar and the pastern bone embracing collar.

In another embodiment of the invention the outer surfaces of the construction comprises a significantly stiffer and harder structure and shape that will retain it's original shape under the

everest of strike impacts and will distribute the force of this impact over a wider area. Due to its hard and smooth curved shape, it will immediately deflect the force of the impact away from the horse's leg.

Detailed Description of the Invention

The invention will be more clearly understood from the following description of some embodiments thereof given by way of example only with reference to the accompanying drawings in which:-

Fig. 1 is a side view of a tendon and ligament support according to the invention on a horse in standing position;

Fig. 2 is a side view of the tendon and ligament support of Fig. 1 representing the horse's fetlock joint under exercise load;

Fig. 3 is a typical vertical cross section through the tendon and fetlock support as illustrated in Fig. 1 on a horse in standing position;

Fig. 4 is a typical vertical cross section through the fetlock support as illustrated in Fig. 2 representing the horse's fetlock joint under exercise load;

Fig. 5 is a side view of an alternative construction of tendon and ligament support;

Fig. 6 illustrates a still further construction of tendon and ligament support;

Fig. 7 is a side view of a still further construction of tendon and ligament support according to the invention;

Fig. 8 is a perspective view of portion of the tendon and ligament support of Fig. 7;

Fig. 9 is a side view of another tendon and ligament support according to the invention;

Fig. 10 is a side view of a still further tendon and ligament support according to the invention;

Fig. 11 is a side view of a still further tendon and ligament support according to the invention;

Fig. 12 a rear view of the tendon and ligament support of Fig. 11;

Fig. 13 is a side view of another tendon and ligament support according to the invention;

Fig. 14 is a side view of the tendon and ligament support of Fig. 13 in the loaded position;

Fig. 15 is a part sectional view of an artificial tendon according to the invention;

Fig. 16 is a side view similar to Fig. 15 of the artificial tendon in the loaded position;

Fig. 17 is a side sectional view of a still further artificial tendon according to the invention;

Fig. 18 is a side view of the artificial tendon of Fig. 17 in the loaded position;

Fig. 19 is a side view of a still further tendon and ligament support according to the invention

Fig. 20 is a cross-sectional view along the lines X-X of Fig. 19;

Fig. 21 is a cross-sectional side view of a tendon and ligament support on a horse's leg;

Fig. 22 is a cross-sectional side view of the tendon and ligament support on a horse's leg;

Fig. 23 is a cross-sectional plan view along the lines AA of Fig. 22;

Fig. 24 is a perspective view of still a further tendon and ligament support according to the invention;

Fig. 25 is a further perspective view of the tendon and ligament support of Fig. 24; and

Fig. 26 is a still further perspective view of the tendon and ligament support of Fig. 24.

Fig. 27 is a part development view of the tendon and ligament support of Fig. 24

Fig. 28 is a cross-sectional side view of a tendon and ligament support on a horse's leg;

Fig. 29 is a cross-sectional side view of the tendon and ligament support;

Referring to the drawings and initially to Figs. 1 to 4 thereof there is provided a fetlock support indicated generally by the reference numeral 1 having a canon bone embracing collar 2 and a pastern bone embracing collar 3 connected by a connecting piece 4 formed from an inelastic material of high tensile strength, which allows limited elongation under load. The connecting piece

4 which runs along the palmar aspect of the metacarpus and digit, effectively will exert a resistance to rotating about a pivot point 5 over a predetermined range of fetlock joint rotation. Interposed between the horse's leg and the canon bone embracing collar 2 and the pastern bone embracing collar 3 is a cushioning material 8. The cushioning material 8 may be of any natural or synthetic material such as a visco elastic foamed plastic. This material has been found to be most effective at absorbing the impact of a strike from a hind leg.

The connection piece which can be made from any suitable inelastic and high tensile material such as unidirectional kevlar fibre will allow limited elongation and effectively provide a resistance to fetlock joint rotation within the connection piece by its very nature. Thus there is an inelastic support of high tensile strength provided which will prevent excessive pivoting of the fetlock joint and hence excessive tensile stress on the tendons and ligaments. The fetlock joint point of rotation is identified by the reference numeral 5 as are the sesamoid bones by the reference numeral 6. The hoof is identified by the reference numeral 7.

When the horse places weight on it's leg, a compression load identified by the reference letter X in Fig. 2 and 4 is exerted on the canon bone. As it does so the cannon bone moves downwards towards the ground and this in turn causes the fetlock joint 5 to rotate. The connecting piece 4 resists this said rotation as it must now stretch under tensile load. Since the connection piece is inelastic, of a high tensile strength and is securely anchored between the canon bone embracing collar 2 and the pastern bone embracing collar 3 it will resist rotation of the fetlock joint 5. Since this rotation of the fetlock joint is the cause of tensile stress on the flexor tendons and ligaments of the horse, any reduction of this said rotation by artificial means will artificially reduce the said stress on the tendons.

Referring to Fig. 5 there is illustrated an alternative construction of tendon and ligament support indicated generally by the reference numeral 10 in which parts similar to those described with reference to the previous drawings are identified by the same reference numerals. In this embodiment the connecting piece comprises a compression hinge 11 between the canon bone embracing collar 2 and the pastern bone embracing collar 3. An artificial tensile tendon 12 is mounted between the canon bone embracing collar 2 and the pastern bone embracing collar 3 behind the fetlock joint 5. This tensile tendon 12 is an inelastic connection piece and will provide support for the tendons and ligaments by exerting a resistance to the pivoting of the canon bone collar 2 about the pastern bone embracing collar 3 in the same manner as described above. The purpose of this hinge 11, which rotates concentrically with the pivot point of the fetlock joint 5, is to keep separate the two collars as they are inclined to be pulled together by the artificial tensile tendon, under high load.

Referring now to Fig. 6 there is illustrated a still further construction of tendon and ligament support indicated generally by the reference numeral 20 which is substantially similar to the

tendon and ligament support 10 illustrated in Fig. 5 and parts similar to those described with reference to the previous drawings are identified by the same reference numerals. In this embodiment there is provided a compression hinge 21 which, unlike the hinge of Fig. 5, resists rotation by means of friction within the bearing surfaces of the hinge itself. The hinge can be of any suitable construction. It is envisaged that the hinge may be resistant to rotation in one or both directions.

Referring now to Figs. 7 and 8 there is illustrated a still further construction of tendon and ligament support indicated generally by the reference numeral 30 in which parts similar to those described with reference to Fig. 5 are identified by the same reference numerals. In this embodiment, each of the bone embracing collars 2 and 3 incorporate a pair of rigid bars 31 in a pad 32 as can be seen clearly in Fig. 8. The bars 31 will help to distribute the load across both the canon bone embracing collar 2 and the pastern bone embracing collar 3.

Referring now to Fig. 9 there is illustrated a still further construction of tendon and ligament support indicated generally by the reference numeral 40 in which parts similar to those described with reference to Fig. 5 are identified by the same reference numerals. In this embodiment there is provided a pastern bone embracing collar 41 which extends over the hoof 7 providing further support.

In Fig. 10 there is illustrated an alternative construction of tendon and ligament support 50 which is substantially identical to the tendon and ligament support illustrated in Fig. 9 except that there is provided a pastern bone embracing collar 51 securely connected to a hoof shoe support 52 fitted beneath the hoof 7.

Referring now to Figs. 11 and 12 there is illustrated an alternative construction of tendon and ligament support indicated generally by the reference numeral 60. In this embodiment which is substantially similar to the embodiment illustrated in Fig. 5 and in which parts similar to those described with reference to Fig. 5 are identified by the same reference numerals, there is provided an artificial tensile tendon 61 which extends around the leg to brace the sesamoid bones behind the fetlock. The advantage of this is that if any weight that might be transmitted to the sesamoid bones is now transmitted over a wider area for reduced pressure on the sesamoid bones. Because of the manner in which the artificial tendon 61 is constructed the hinge 11 cannot be clearly seen.

Referring now to Figs. 13 and 14 there is illustrated a still further construction of tendon and ligament support indicated generally by the reference numeral 70, again parts similar to those described with reference to Fig. 5 are identified by the same reference numerals. In this embodiment, there is an artificial tensile tendon 71 connected by a connector piece 72 to the hinge

11. It can be seen from Fig. 12 how the connector piece 72 protects and bears the pressure that would normally be transmitted to the sesamoid bones.

Referring now to Figs. 15 and 16 there is provided an alternative construction of artificial tendon, indicated generally by the reference numeral 72 which comprises a compressible member 73 mounted against a support 74 on the canon bone embracing collar 2, only portion of which is shown. A member engaging means 75 is provided and is connected by a rod 76 and strap 77 to the pastern bone embracing collar which is not illustrated. The compressible member 73 can be formed from any suitable compressible material such as rubber. It will be seen from Fig. 14 how the compressible member 73 is compressed under load.

Referring now to Figs. 17 and 18 there is illustrated an alternative construction of artificial tendon indicated generally by the reference numeral 80 which comprises a cylinder 81 having a mounting hole 82 for connection to one of the canon or pastern bone embracing collars which houses a piston 83 connected by a rod 84 to a strap 85 which can be connected to the other bone embracing collar. Housed within the cylinder 81 by the piston 83 is a compression resistant material 86. This material could be any liquid, gas or a solid material such as a foamed plastics material or rubber. Fig. 18 illustrates how this works under a load X. The important aspect of this latter embodiment is that there is a high level of controllability. By means of altering the volumetric ratio between the compressible material and the actual container or cylinder it is possible to alter clearly the response of the artificial tendon and thus to tailor the Particular construction of artificial tendon to a specific strain curve and thus to an animal's need.

Referring now to Figs. 19 and 20 there is illustrated a canon bone embracing collar indicated generally by the reference numeral 90 incorporating an elongate open-ended cooling channel 91. The advantage of the cooling channel 91 is that it will allow water and air to pass therebetween preventing irritation and other diseases or damage to the horse's legs. These can occur if the temperature of the leg gets too high and also if any pressure is placed on the tendon surface as the horse exercises.

Referring specifically to Figs. 21 to 23 inclusive. Fig. 21 illustrates the heat insulating problem associated with conventional equine leg protection devices 100. The heat, represented by white arrows, radiates from the tendon core 101 outward to the leg surface where it is blocked from further dissipation by the insulating effect of the conventional Boot or Bandage. Heat within the tendon core will then accumulate. Consequently the risk of heat injury to the Tendons and Ligaments is increased by the use of such heat insulating Boots and Bandages. Figs. 22 and 23 illustrate an advantage of the invention in it's ability to aid cooling of the Flexor Tendons and suspensory Ligament during exercise. The device which utilises the high-speed, cold air 102 hitting the front of the horses leg, as it gallops, to pass through Air Intakes 103 at the front of the

device. From there the high-speed, cold air is compressed and channeled via air channels 104 to the Tendons and Ligaments 105. This air then acts as a coolant for the horse's Tendons and Ligaments 105. The circulation of cold air through the structure is enabled by Air Exit Holes 106.

Referring now specifically to Figs. 24 to 27 inclusive, there is illustrated a tendon and ligament support indicated generally by the reference numeral 111 having a canon bone embracing collar 112 and a pastern bone embracing collar 113 connecting together by a compression hinge 114 and a tensile artificial tendon 115. Both collars 112 and 113 are hinged centrally at the back and closed centrally at the front. This enables unitary construction whereby each of the collars requires only two parts. It also enables an easy method of applying the device to the horse's leg. Fig. 27 illustrates the artificial tensile tendon 115 in another embodiment where it comprises a central ring 116 embracing the sesamoid bones. Anchored around the central ring 116 is an array of straps 117, of adjustable tension and length and made from flexible material of high tensile strength such as unidirectional Kevlar fibres. These straps 117 are in turn anchored securely to the canon bone embracing collar and the pastern bone embracing collar. The device resists fetlock joint rotation by means of the inherent compression strength of the carbon fibre joint 114 combined with the tensile strength of the kevlar tensile artificial tendon 115. The amount of resistance that the system provides to fetlock joint rotation is a function of the position of an adjuster 118 with a range of settings. The different settings change the length of the Tensile artificial tendon 115. At the lowest setting, the support element is at its longest and hence slackest length, offering the least amount of support; while at the highest setting the tensile artificial tendon 115 is shortest, offering the greatest degree of support to the fetlock joint.

Referring now specifically to Figs. 28 and 29. Fig. 28 illustrates the over-reach striking problem associated with conventional equine leg protection devices 100. These devices 100 typically have an outer shell made from relatively soft materials such as leather, plastic or woven fabrics. These softer materials cannot resist the strike impact of the most severe over-reach by a hind leg. Consequently the material deforms on impact and the horse commonly gets a traumatic injury. Fig. 29 illustrates a tendon and ligament support comprising a canon bone embracing collar 121. This illustrates the benefits of the invention in the event of an accidental strike from a hind leg. Here a composite panel 123 externally covers the vulnerable anatomy. As can be seen the force of the impact is distributed over the entire length of the device and is immediately deflected away from the horse's tendons and suspensory ligament. The shock absorbent foam 122 underneath further increases this protective effect. This foam can for example be of a visco-elastic type foam with excellent shock absorbing properties. The combination of the inherent stiffness of the composite panel 123, such as but not limited to carbon fibre, and the curved outer shape into which it is moulded ensure that it will not deform in shape during the severest of impacts that can occur during equestrian activities. Also the composite panels are designed in such a way as to take advantage of the combined properties of hard resin carbon fibre. These include hardness, stiffness

and low friction. These characteristics combined in turn with a curved outer shape panels with a low friction, hard surface, will aid to immediately deflect the force of the impacting object away from the fragile anatomy concerned.

The tendon and ligament support according to the present invention will be used for many different purposes. For example, when racing it is important that if the tendon and ligament support is used, it does not in any way interfere with or enhance whatsoever the normal movement of the horse. However, if the tendon and ligament support is arranged not to exert any resistance to rotating until the fetlock joint rotates beyond a point where damage could occur to the horse such as, for example, when a horse is over tired or unfit, then this will not be performance enhancing as the horse will no longer be able to race effectively but would simply prevent injury. A similar situation may occur during training. Further, when a trainer is attempting to build up a horse's strength after a long lay off whether due to injury or some other reason then providing some support to the tendon and ligament joints by having a progressively increasing resistance to pivoting may be advantageous. Further, when a horse has been injured it may be necessary to provide almost complete immobility of a fetlock joint to ensure that the tendons and ligaments are not damaged should they be sound or if they are damaged, to give them sufficient time and opportunity under rest conditions to recover.

Many materials may be used in the construction of the present invention. For example composite materials are often advantageous in situations such as this. A carbon fibre material would be particularly advantageous for the manufacture of the various parts of the invention. This material can be used to give a very high level of structural stiffness and at the same time is relatively lightweight. Obviously in situations where lightness of weight is not crucial, for example when the invention is used for the treatment of injury, less expensive material such as aluminium or steel, while heavier, may be used as they will still provide the relative degree of structural stiffness. As explained above. Visco elastic foamed plastics, glass fibre and Kevlar materials are also advantageously used,

It is envisaged that any suitable materials may be used to manufacture the invention. It is further envisaged that the hinges may provide some lateral play.

In the specification the terms "comprise, comprises, comprised and comprising" or any variation thereof and the terms "include, includes, included and including" or any variation thereof are considered to be totally interchangeable and they should all be afforded the widest possible interpretation and vice versa.

The invention is not limited to the embodiments hereinbefore described which may be varied in both construction and detail.

CLAIMS

1. A tendon and ligament support of the type comprising:-

a canon bone embracing collar,

a pastern bone embracing collar,

a connection between the two rollers; characterised in that the connection comprises a substantially non rigid connection piece incorporating a pivot means arranged to exert a resistance to pivoting over a predetermined range of fetlock joint rotation.

a shock absorbing foam lining .

a front panel with air intakes allowing air or fluid to penetrate through the front of the device.

Connecting channels which allow the coolant air or fluid that enter through the front to pass from the front of the leg around to the back of the leg where the said tendons and ligaments are located.

a gas permeable panel covering the tendon area at the back of the leg which allows hot or cold air or fluid to pass. This comprises materials that include but are not restricted to a gridwork of perforated foam or a gas permeable membrane such as a thin fabric.

a curved composite material panel of a hard and smooth outer surface, attached to the back of the foam lining about the position of the horse's flexor tendons and suspensory and check ligaments.

a curved composite material panel of a hard and smooth outer surface, attached externally to the front of the foam lining about the position of the horse's extensor tendons.

a curved composite material panel of a hard and smooth outer surface, attached externally to the foam lining about each side of the horse's fetlock joint.

a means of fastening the device to the horse's leg

2. A tendon and ligament support as claimed in claim 1 in which the pivot means incorporates adjustment means to vary the amount of its resistance to pivoting and the range of fetlock joint rotation over which it exerts said resistance.
3. A tendon and ligament support as claimed in claim 1 or 2 in which the pivot means is arranged to prevent pivoting beyond a predetermined critical amount of fetlock joint rotation.

4. A tendon and ligament support as claimed in any of claims 1 to 3 in which the pivot means is arranged to exert progressively increasing resistance to pivoting as the fetlock joint rotates under downward pressure.
5. A tendon and ligament support as claimed in any of claims 1 to 3 in which the pivot means is arranged to exert a substantially constant resistance to pivoting as the fetlock joint rotates under downward pressure.
6. A tendon and ligament support as claimed in any of claims 1 to 3 in which the pivot means is arranged to exert no resistance to pivoting until the fetlock joint rotates beyond a predetermined critical amount of fetlock joint rotation.
7. A tendon and ligament support as claimed in any preceding claim in which the connection piece accommodates limited lateral movement between canon and pastern bones.
8. A tendon and ligament support as claimed in any preceding claim in which the pivot means is formed by a hinge having its pivot joint coincident with that of the fetlock joint.
9. A tendon and ligament support as claimed in claim 8 in which there are a pair of hinges, one on either side of the fetlock joint.
10. A tendon and ligament support as claimed in claim 8 or 9 in which the hinge incorporates a brake to provide desired resistance to pivoting.
11. A tendon and ligament support is claimed in which the hinge incorporates a stop to prevent rotation beyond a predetermined critical amount of fetlock joint rotation.
12. A tendon and ligament support is claimed in which the desired resistance to pivoting is provided by an artificial tensile tendon comprising an extendable connection piece connecting the collars adjacent the back of a horses leg.
13. A tendon and ligament support is claimed in which the artificial tensile tendon extends around the leg to embrace the sesamoid bones behind the fetlock.
14. A tendon and ligament support is claimed in which there is a rigid connection between the hinge and the artificial tensile tendon on both sides of the leg to allow limited movement therebetween.

15. A tendon and ligament support as claimed in claim 8 or 9 in which the resistance to pivoting is provided by an artificial tendon comprising:-

a compressible member mounted against a support on one collar;

a member engaging means embracing the member between itself and the support and connected to the other collar whereby pivoting movement of one collar away from the other causes the member to be compressed.

16. A tendon and ligament support as claimed in claim 15 in which the compressible member is formed from a foamed plastics material.
17. A tendon and ligament support as claimed in claim 15 in which the compressible member is formed from a pressurised bellows.
18. A tendon and ligament support as claimed in claim 15 in which the compressible member comprises a piston and cylinder arrangement housing a compressible material.
19. A tendon and ligament support as claimed in claim 15 in which the compressible member comprises a piston and cylinder arrangement housing a compressible material.
20. A tendon and ligament support is claimed in which the resistance to pivoting is provided by an artificial tendon comprising:-

A central ring embracing the pastern bones;

An array of high tensile straps anchored to the central ring and each in turn anchored, at their opposite ends, to the canon bone embracing collar and the pastern bone embracing collar;

An adjuster to vary the tension or length of the artificial tensile tendon.

21. A tendon and ligament support as claimed in any of claims 1 to 7 in which the connection piece comprises a piece of substantially inelastic material capable of limited elasticity to provide pivotal resistance.
22. A tendon and ligament support as claimed in any preceding claim in which the canon bone embracing collar incorporates a rigid elongate support extending along the canon bone.

23. A tendon and ligament support as claimed in any preceding claim in which the pastern bone embracing collar incorporates a rigid elongate support extending along the pastern bone.
24. A tendon and ligament support as claimed in claim 23 in which the pastern bone embracing collar extends over the hoof.
25. A tendon and ligament support is claimed in which the elongate support is adjacent the front leg.
26. A tendon and ligament support as claimed in any preceding claim in which either collars comprise air intake entrances at the front face of the device.
27. A tendon and ligament support as claimed in any preceding claim in which there are channels to allow coolant gas or liquid pass from one part of the device to another.
28. A tendon and ligament support as claimed in any preceding claim in which there are Exit Holes to allow unrestricted flow of coolant gas or fluid around the horse's leg.
29. A tendon and ligament support is claimed which the air intake has an enlarged laterally projecting open mouth to provide increased air intake.
30. A tendon and ligament support as claimed in any preceding claim in which a cushioning material is interposed between a collar and the horse's leg.
31. A tendon and ligament support is claimed in which the cushioning material is of a visco elastic foamed plastics material.
32. A tendon and ligament support is claimed in which there is a canon bone embracing collar and a pastern bone embracing collar connecting together by a compression hinge and a tensile artificial tendon where both collars are hinged centrally at the back and closed centrally at the front in two opposing symmetrical halves.
33. A tendon and ligament support is claimed having a composite panel externally covering the vulnerable anatomy of the leg, with a visco elastic foam cushioning underneath.

34. A tendon and ligament support having a composite panel, externally covering the vulnerable anatomy of the leg, as claimed in claim 33, which is sufficiently stiff to resist deforming in shape or flexing when struck by an external object such as a blow from a hind leg.
35. A tendon and ligament support having a composite panel externally covering the vulnerable anatomy of the leg, as claimed in claim 33 having a hard, low friction surface, externally exposed at the back of the front leg which would receive the blow from a hind leg.
36. A tendon and ligament support having a composite panel externally covering the vulnerable anatomy of the leg, as claimed in claim 33 having a curved external surface angled obliquely to the direction of a blow from a hind leg.
37. A tendon and ligament support as claimed in any of the preceding claims in which the pivot means is arranged to exert resistance to pivoting of the fetlock joint in extension only while at the same time allowing unrestricted movement of the joint in flexion.

Abstract

A Tendon and Ligament Support

A tendon and ligament support that can effectively limit tendon and ligament strain as a horse exercises or rests by limiting the degree of rotation of the fetlock joint to a safe level and of which such support can be adjusted by the user. A canon bone embracing collar 2 and a pastern bone embracing collar 3 are connected by a connecting piece 4 formed from an inelastic material of high tensile strength, which allows limited elongation under load. The connecting piece 4, which runs along the palmar aspect of the metacarpus and digit, effectively will exert a resistance to rotating about the fetlock joint 5 over a predetermined range of fetlock joint rotation. The support also provides a cooling means to reduce core temperature of the tendons and ligaments as a horse gallops, further reducing injury.

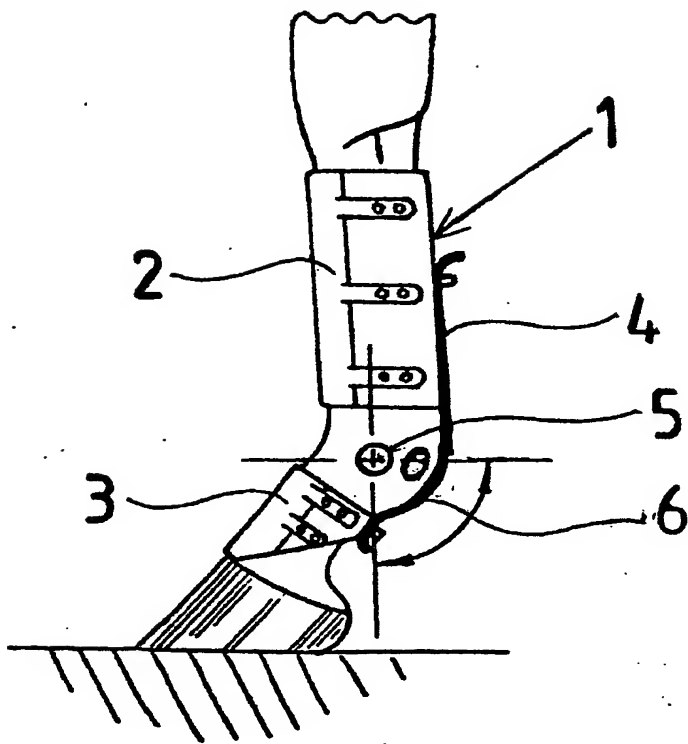


FIG 1



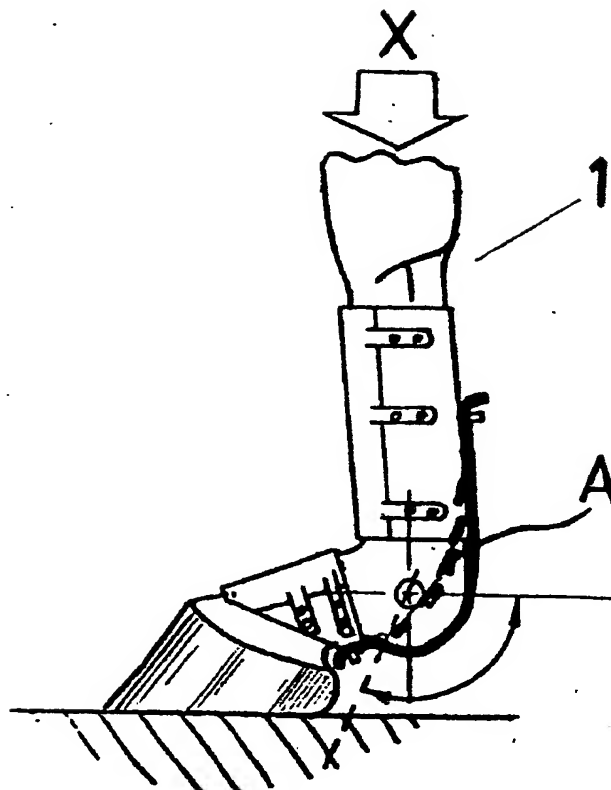


FIG 2



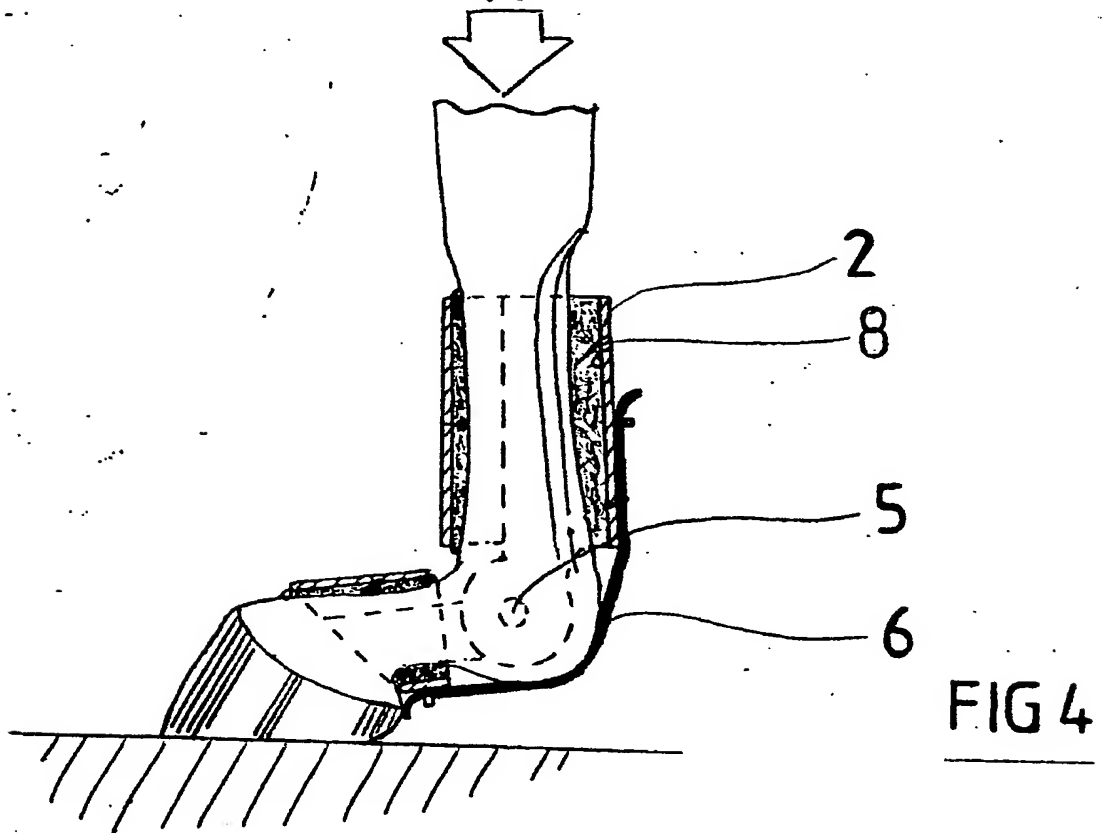

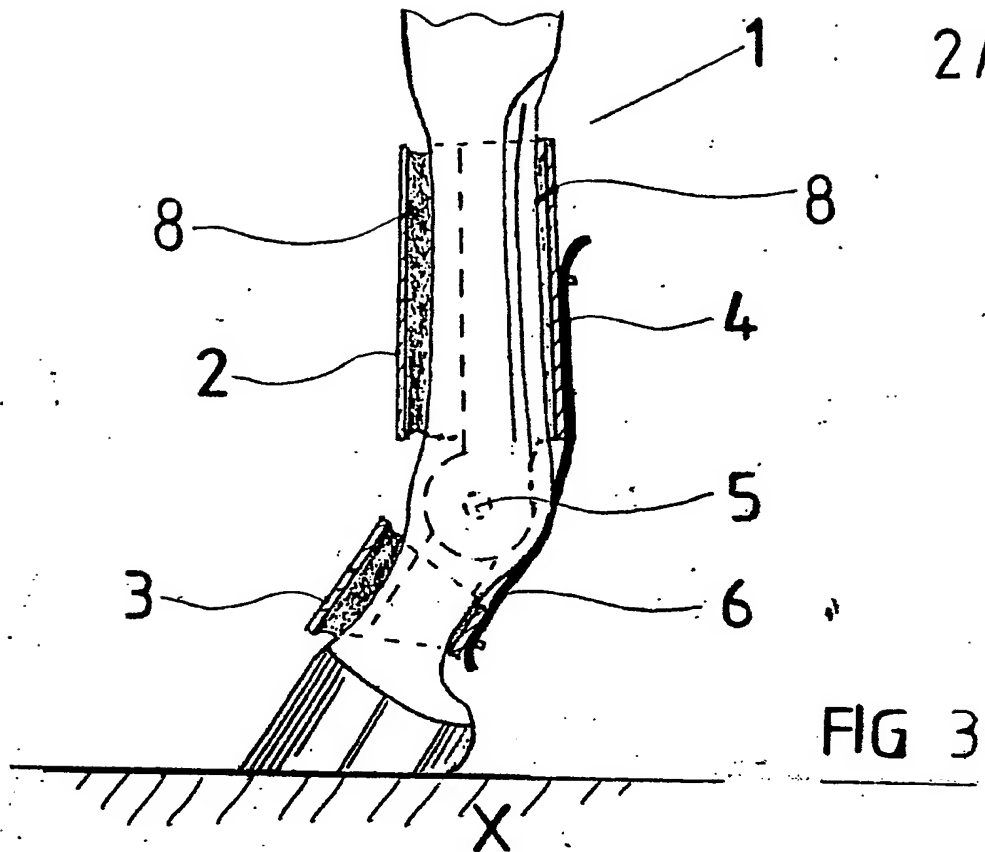

3/14

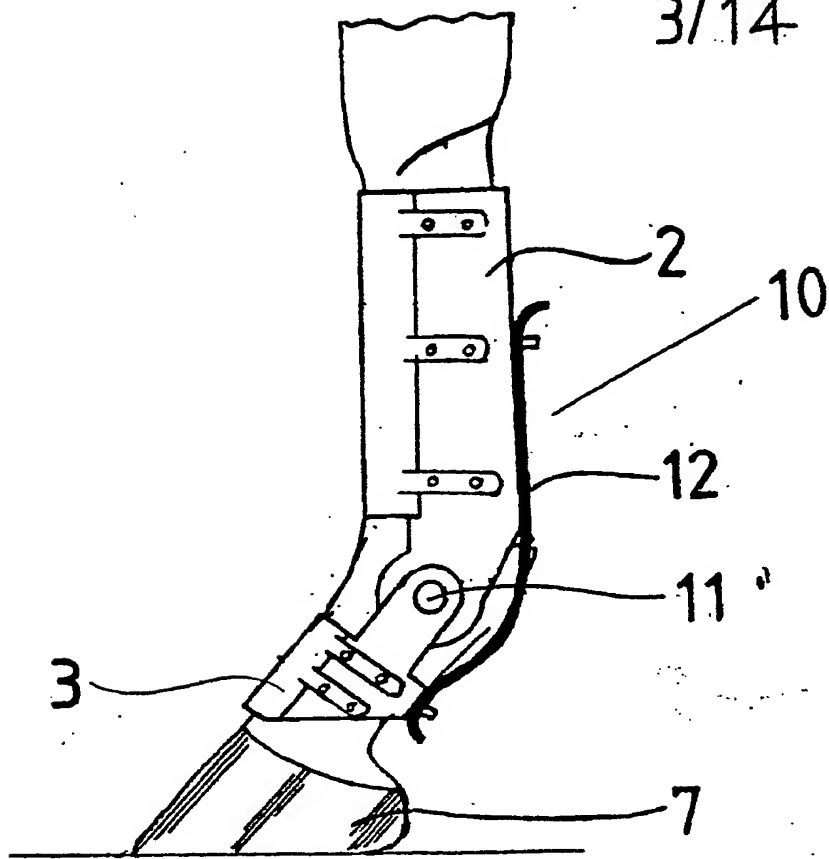


FIG 5



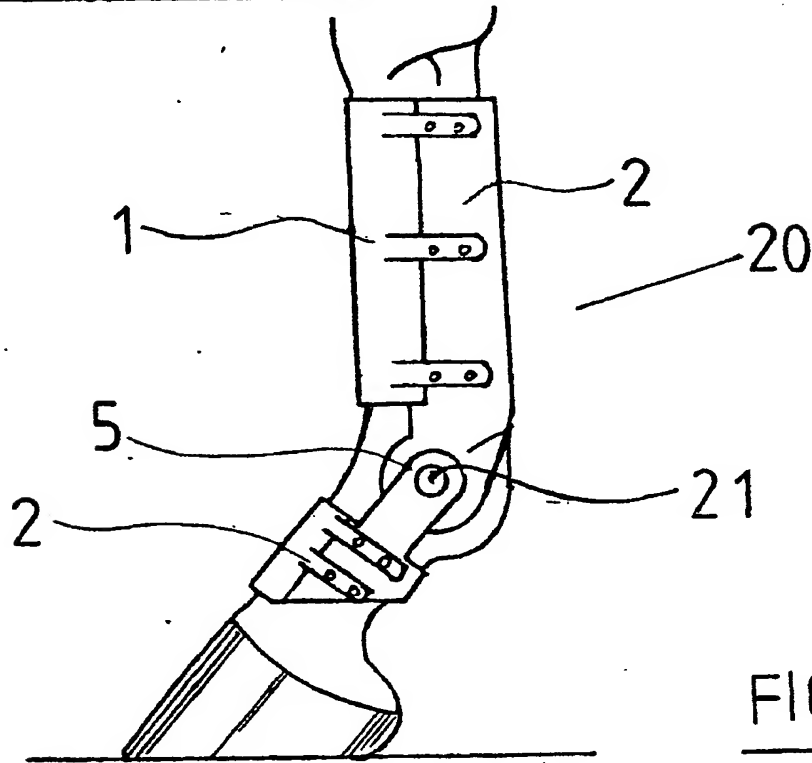


FIG 6



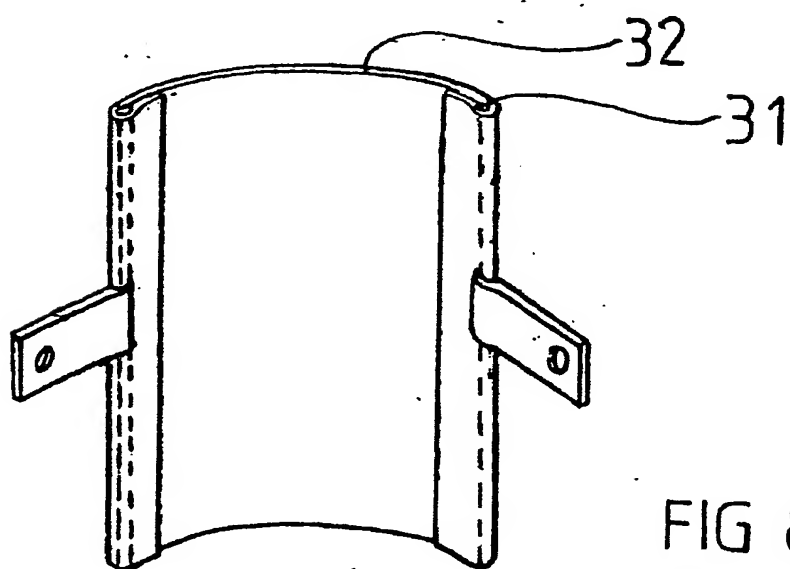

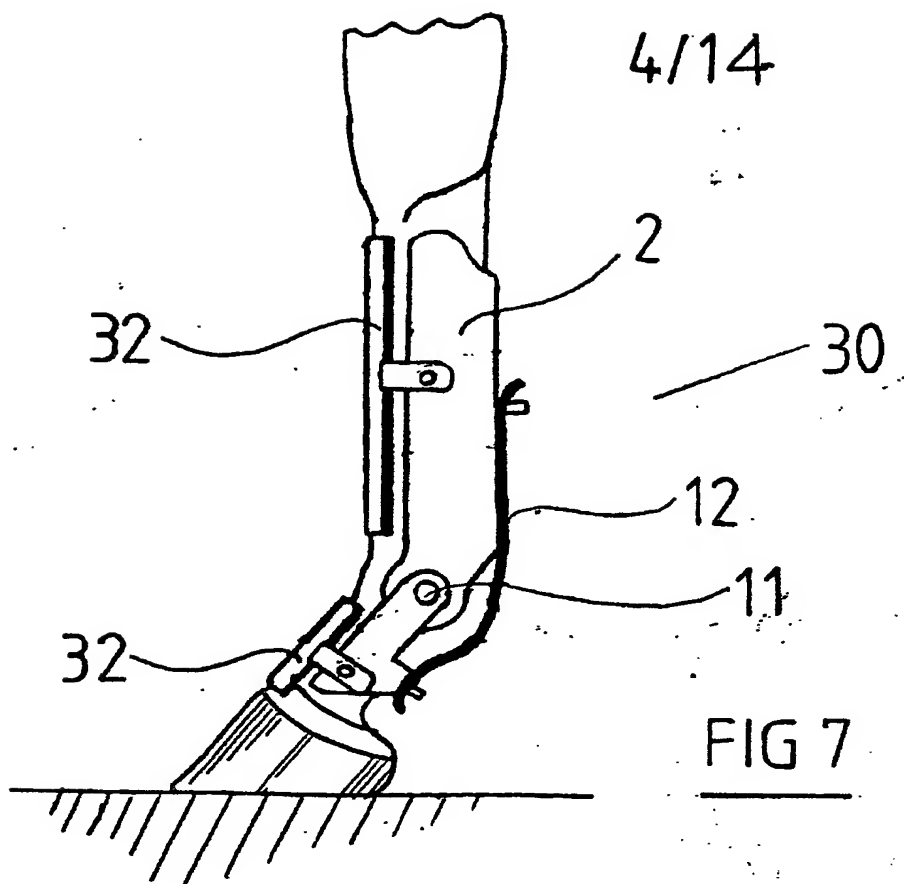

5/14

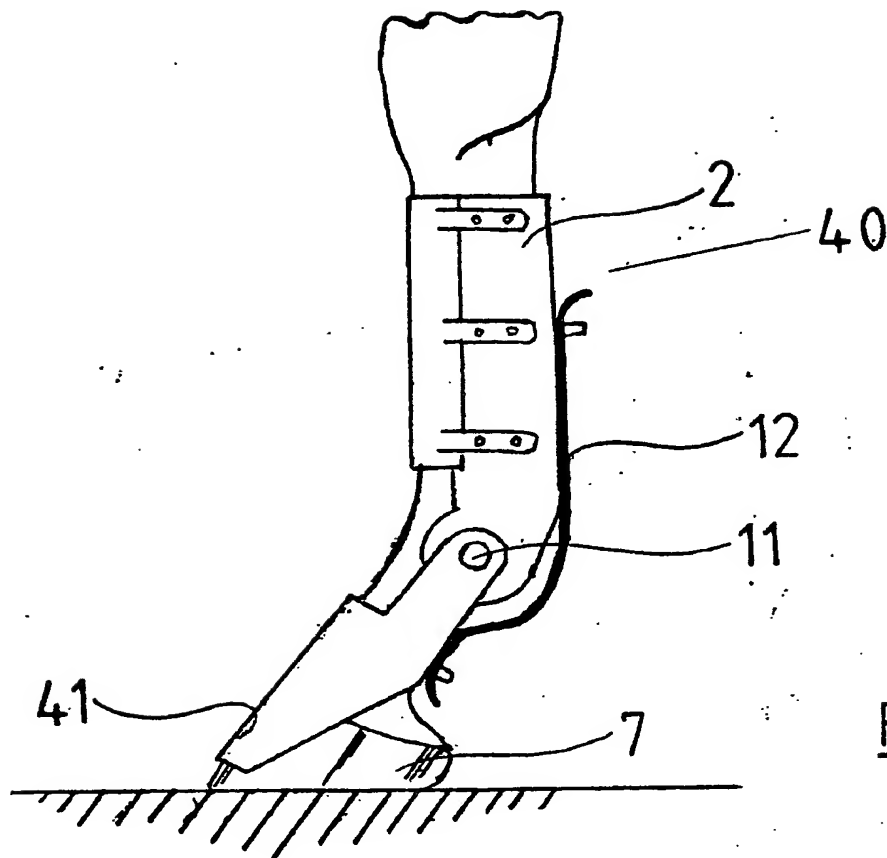


FIG 9



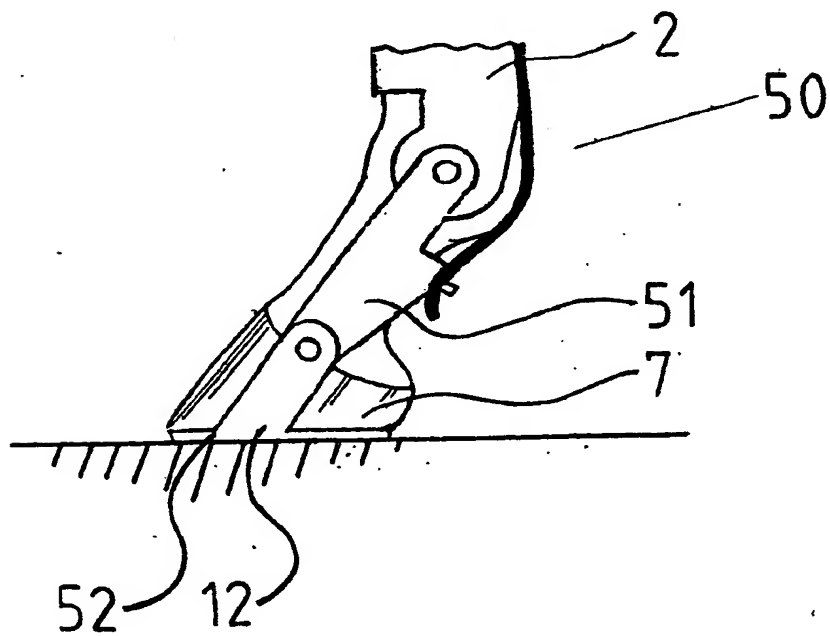


FIG 10

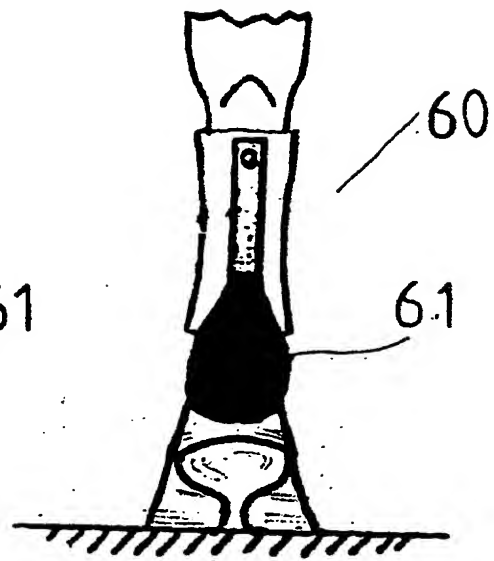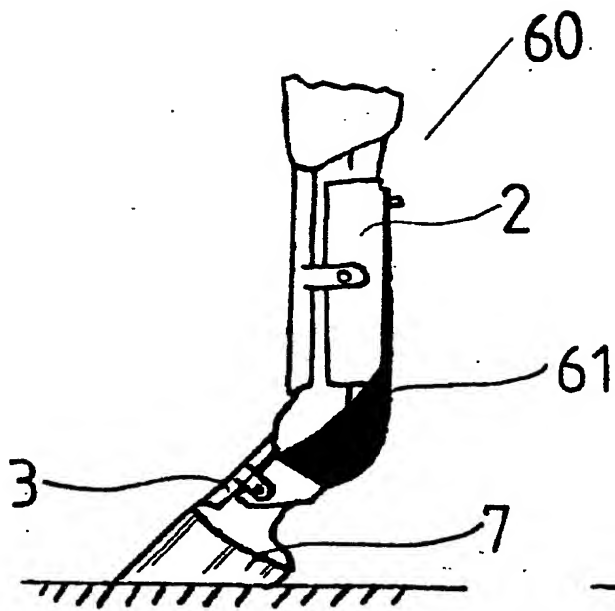

6/14





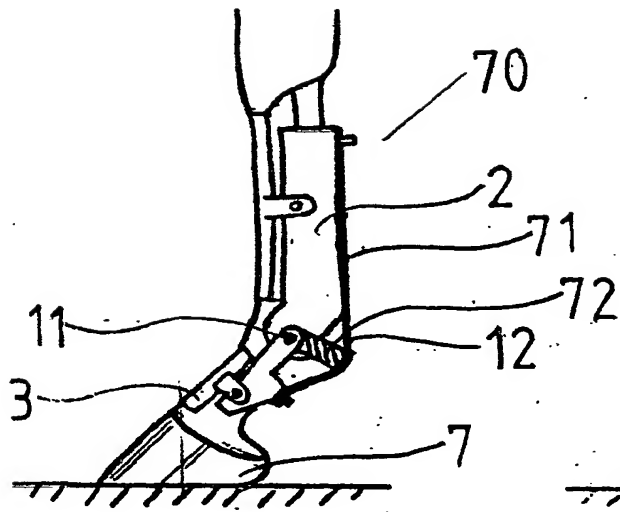


FIG 13



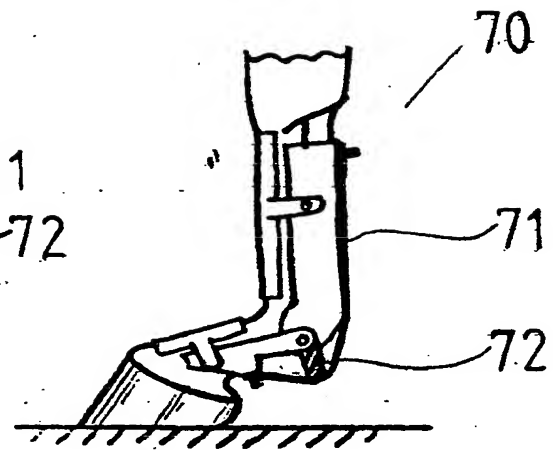


FIG 14



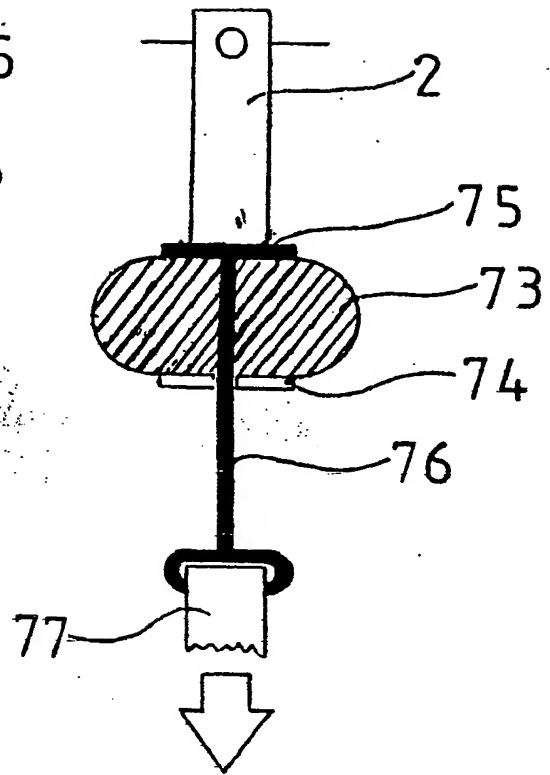

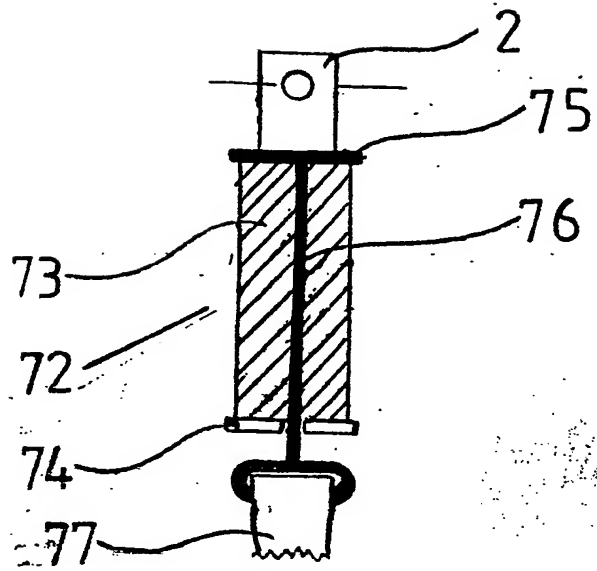

9/14

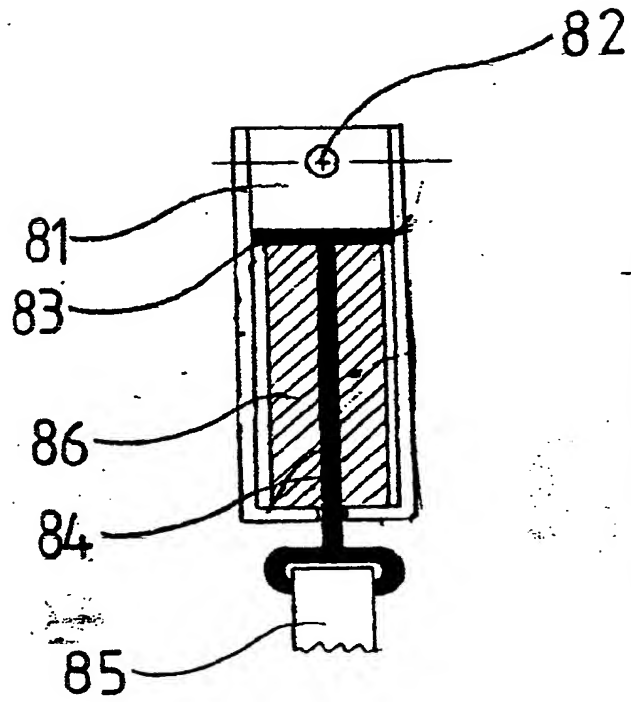


FIG 17

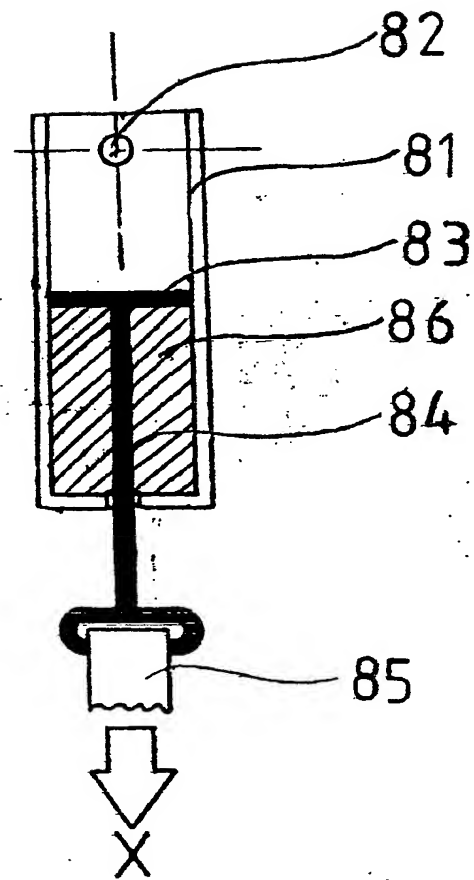


FIG 18



10/14


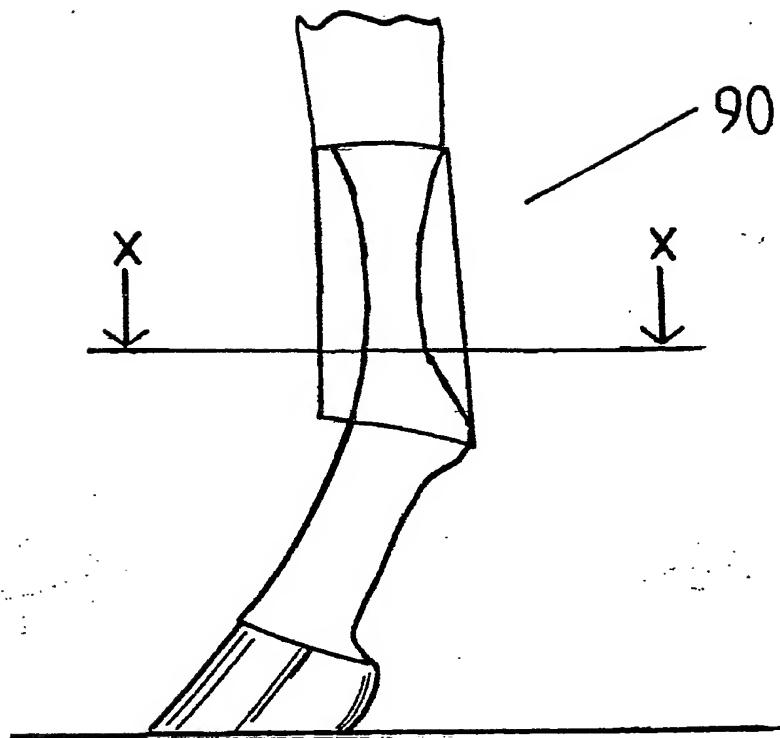


FIG 19






SEC X-X

FIG 20

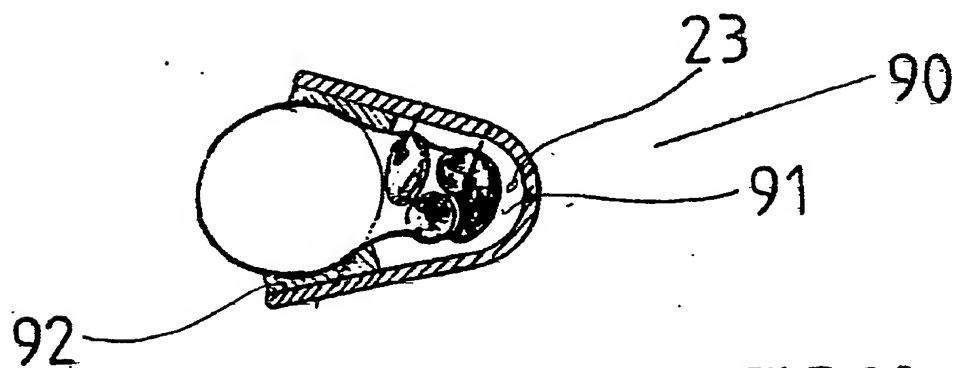

11/14

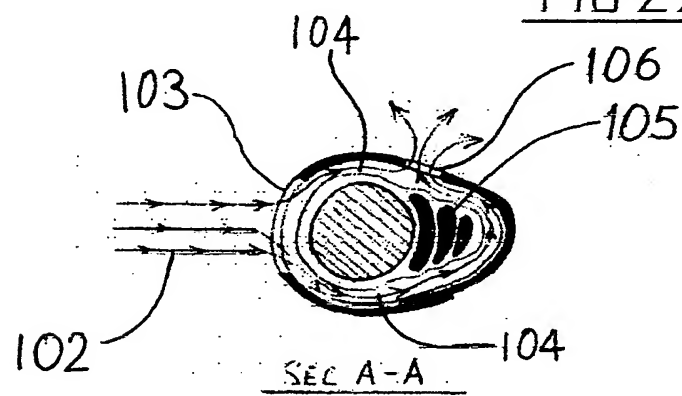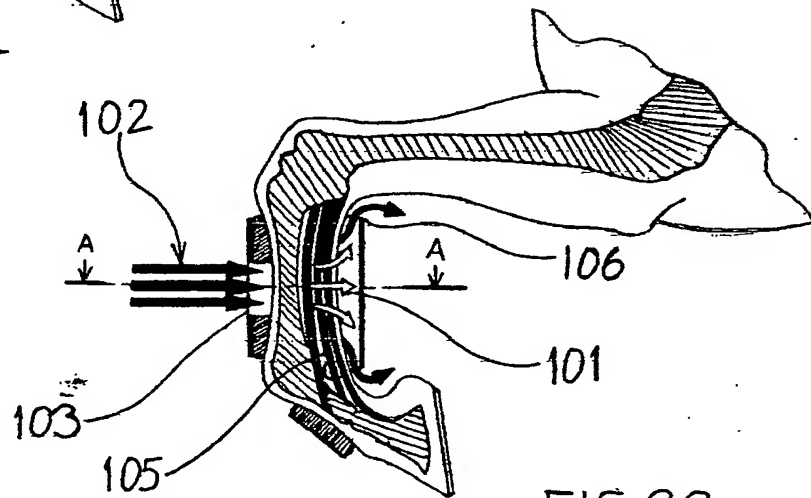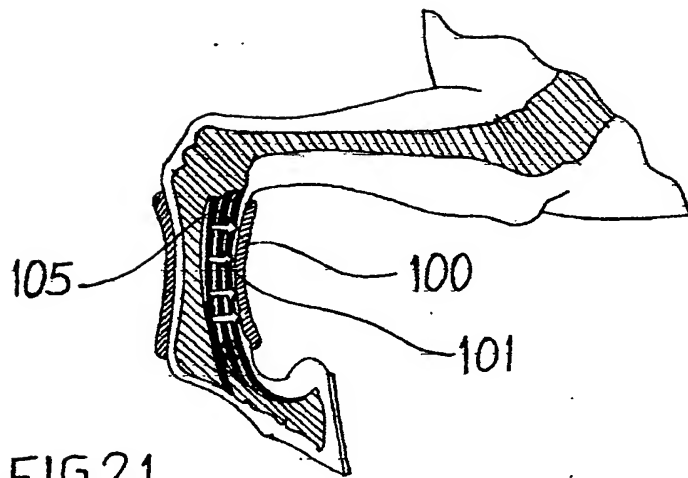



12/14




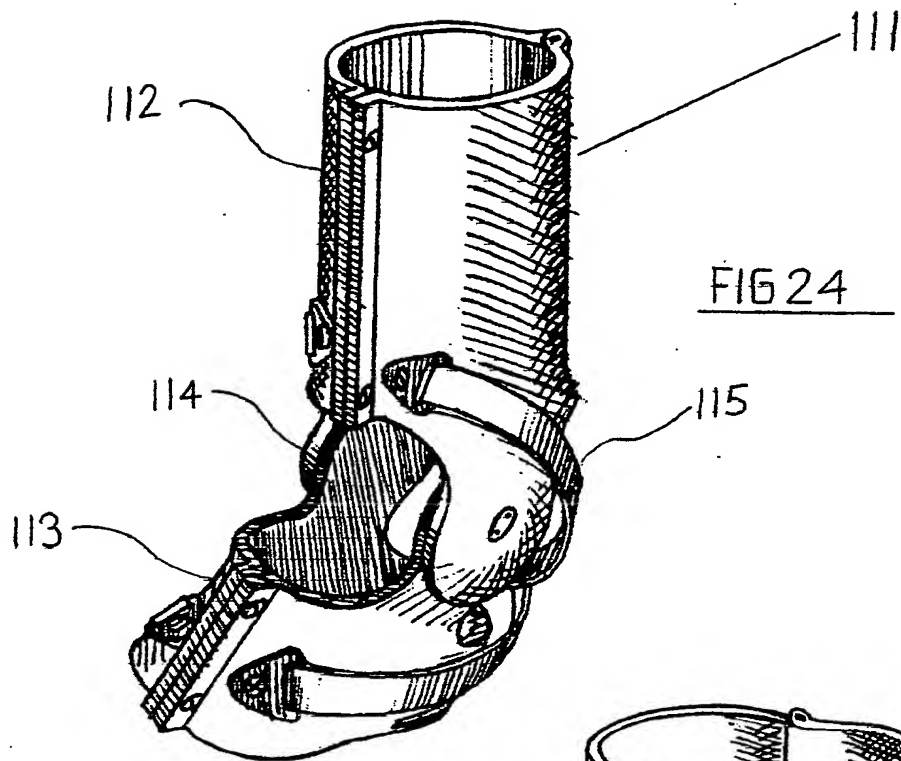


FIG 25

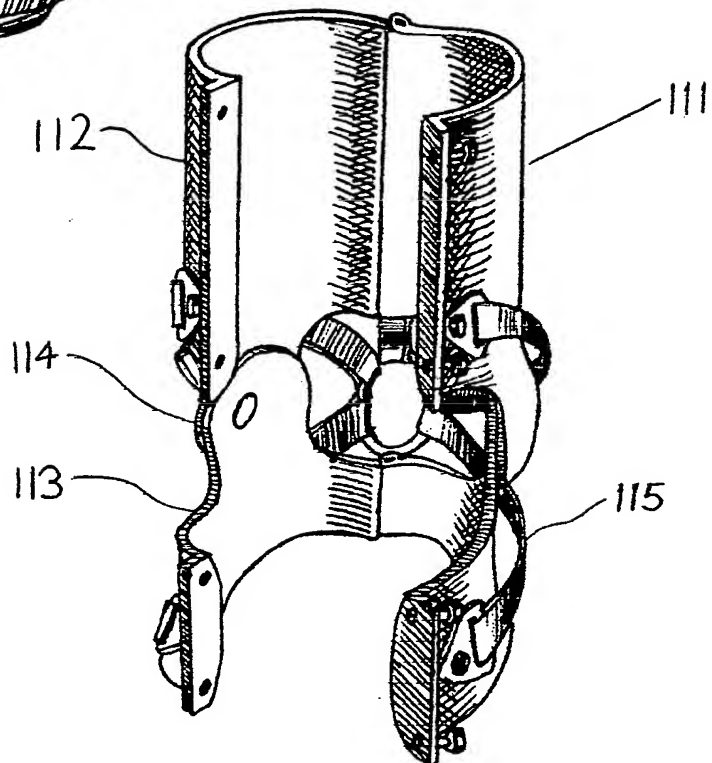

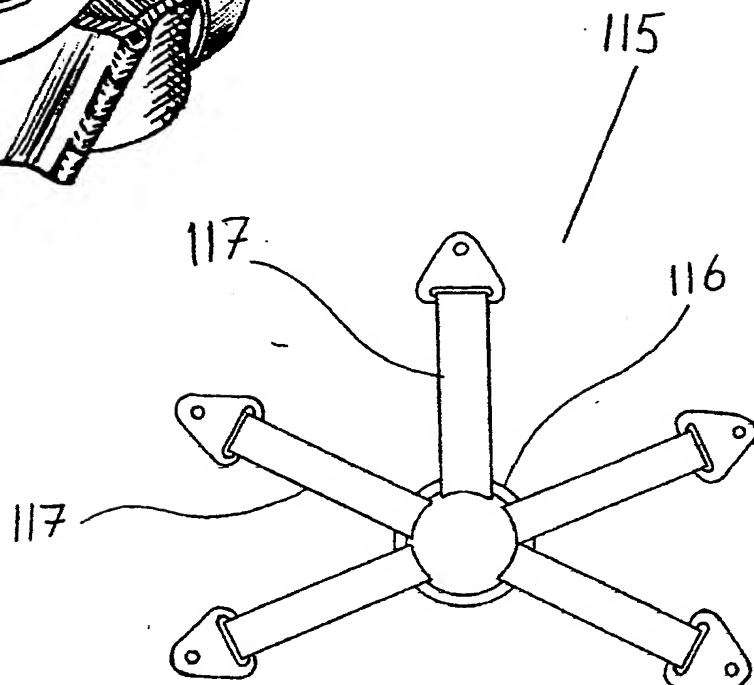

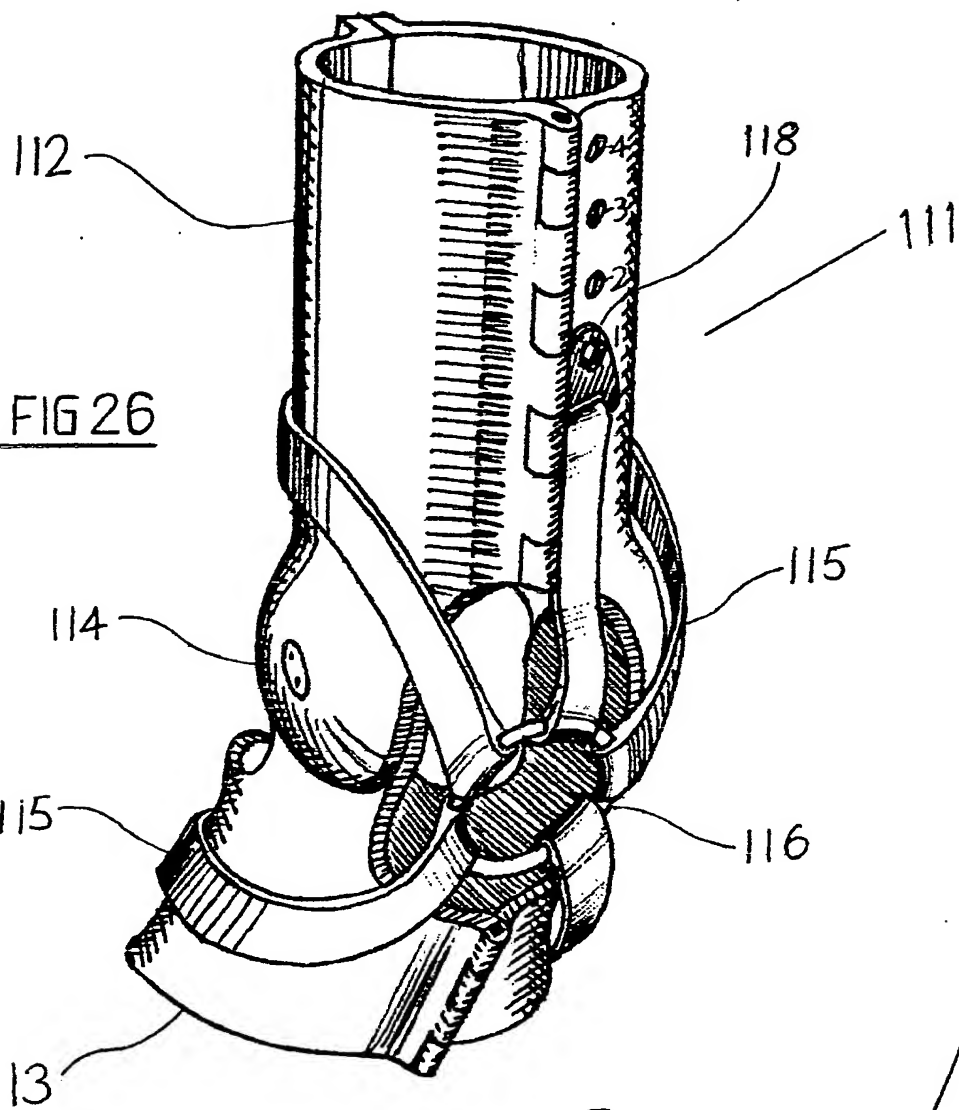

14/14

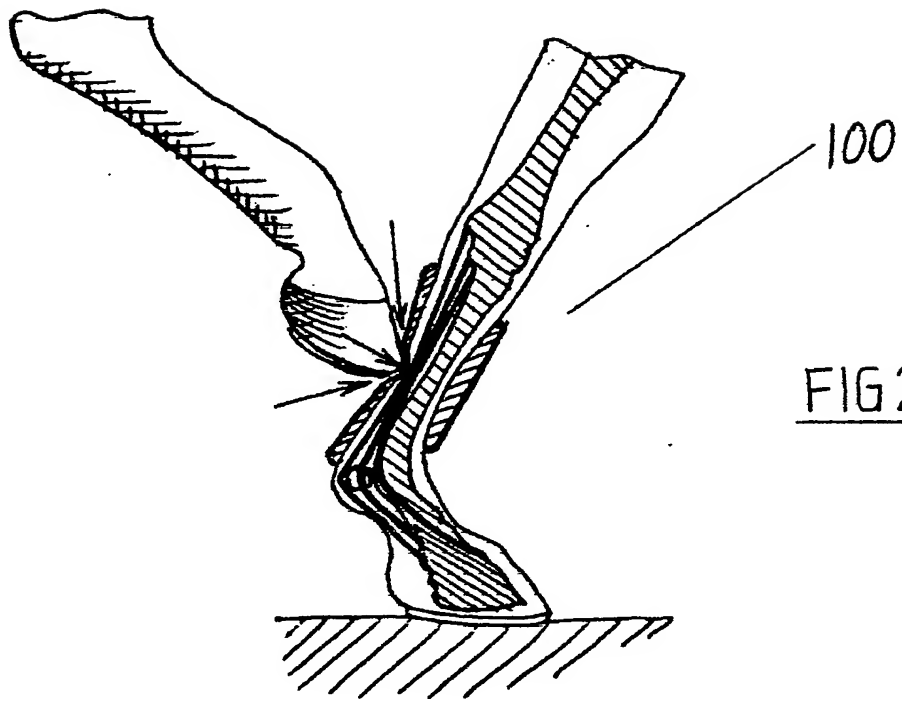


FIG 28

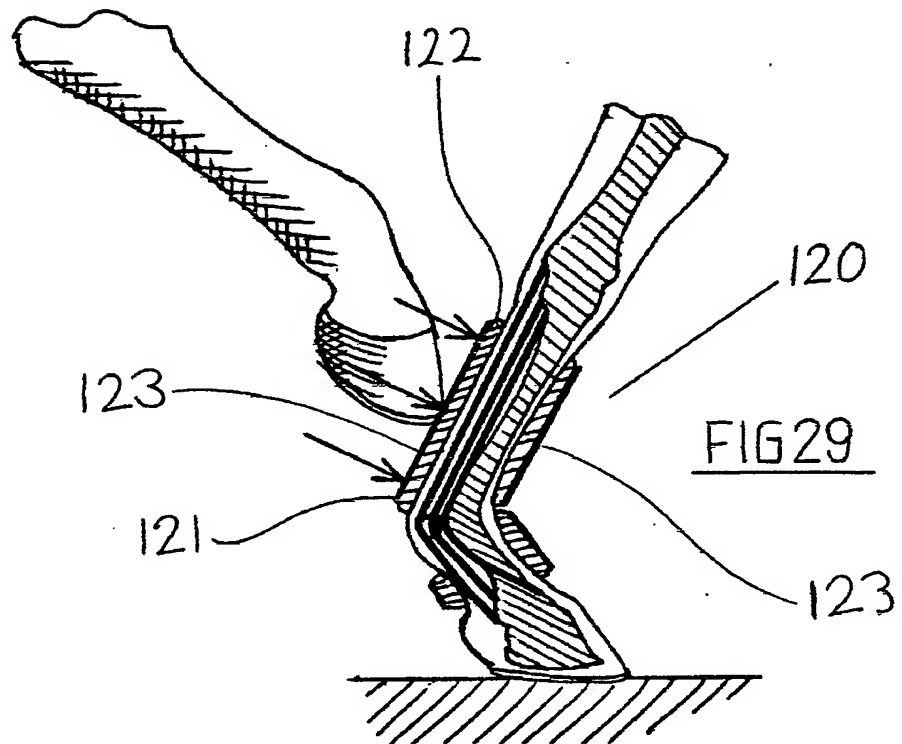


FIG 29

